

(43) Date of publication of application: **25.11.97**


(71) Applicant: **MATSUSHITA ELECTRIC IND CO LTD**

(72) Inventor: **WADA SHINJI  
NAGAI NOBUAKI  
MURANO YUICHI  
WATANABE KOICHI  
IKEDA YUKINORI**

(57) Abstract:

**PROBLEM TO BE SOLVED:** To provide a waste gas filter capable of preventing the occurrence of crack at the vicinity of the crossing part of a ceramic wall due to a thermal stress generated at the time of regeneration.

**SOLUTION:** This filter is consists of a honeycomb columnar body in which a ceramic lattice 2 is formed by being partitioned with a ceramic wall 4 consisting essentially of aluminum titanate. The cell shape consisting of the ceramic lattice 2 is made square, the thickness T of the ceramic wall 4 other than the vicinity of the crossing part of the ceramic wall 4 is made almost constant at the inside of the honeycomb columnar body, and the thickness of the ceramic wall 4 at the vicinity of the crossing part of the ceramic wall 4 is made thicker than the other ceramic wall 4, thus the occurrence of the crack at the vicinity of the crossing part of the ceramic wall 4 due to the thermal stress generated at the time of regeneration is prevented.

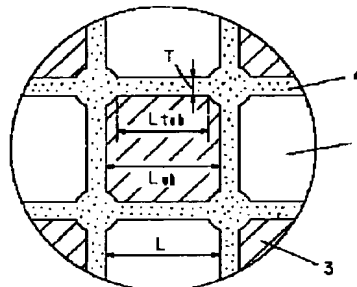

COPYRIGHT: (C)1997,JPO